

INVERSOR DC - AC onda senoidal pura



▲ 150W (200x 132x 72 mm)

▲ 300W (237x 155x 72 mm)


▲ 600W (295x 180x 72 mm)

▲ 1500W (390x 275x 105 mm)

■ Features

- Pure sine waveform THD <5.0%
- Loading controlled cooling fan
- Input protections: Polarity reverse / Under and Over voltage / Low battery alarm
- Output protections: Short circuit / Over load / Over temp.
- Power saving mode $\leq 1.5W$ to conserve energy (S1500 only)
- Input and output fully isolation
- Display input / Output level and Failure status
- Built-in voltage and watt. meter (S1500 only)
- With power ON/OFF switch
- ON-OFF remote control (optional)

■ Output Socket (optional)

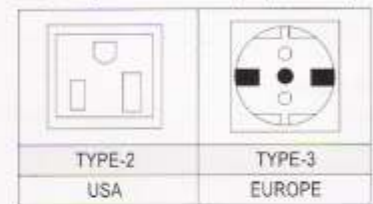

■ General Specification (Please refer to www.meanwell.com for detail spec.)

MODEL No.	S150	S300	S600	S1500
Continous output voltage	150W	300W	600W	1500W
Peak output wattage (3 min.)	200W	400W	800W	2000W
DC input rated voltage	12.5VDC or 25.0VDC			
AC output voltage	110VAC(rms) / 60Hz or 220VAC(rms) / 50Hz			
AC waveform (THD)	5.0%		3.0%	
AC regulation	-10~+4%			
Working temperature	0~40°C			
Safety standards	110V	UL458 approved		
	220V	Compliance to EN60950 (LVD)		
EMC standards	110V	Compliance to FCC class B		
	220V	Compliance to EN50081-1, EN50082-1, EN55022 class B, EN61000-4-2,3, ENV50204		



■ 150W

Model No.	Continue power	Peak power	Input VDC	Output VAC / Hz	Output socket	Effi.
S150-112B2	150W	200W	10.5-15	110/60	TYPE-2	86%
S150-124B2	150W	200W	21.0-30	110/60	TYPE-2	87%
S150-212E3	150W	200W	10.5-15	220/50	TYPE-3	85%
S150-224E3	150W	200W	21.0-30	220/50	TYPE-3	88%

■ 300W

Model No.	Continue power	Peak power	Input VDC	Output VAC / Hz	Output socket	Effi.
S300-112B2	300W	400W	10.5-15	110/60	TYPE-2	87%
S300-124B2	300W	400W	21.0-30	110/60	TYPE-2	88%
S300-212E3	300W	400W	10.5-15	220/50	TYPE-3	86%
S300-224E3	300W	400W	21.0-30	220/50	TYPE-3	89%

■ 600W

Model No.	Continue power	Peak power	Input VDC	Output VAC / Hz	Output socket	Effi.
S600-112B2	600W	800W	10.5-15	110/60	TYPE-2	88%
S600-124B2	600W	800W	21.0-30	110/60	TYPE-2	90%
S600-148B2	600W	800W	42.0-60	110/60	TYPE-2	91%
S600-212E3	600W	800W	10.5-15	220/50	TYPE-3	92%
S600-224E3	600W	800W	21.0-30	220/50	TYPE-3	94%
S600-248E3	600W	800W	42.0-60	220/50	TYPE-3	94%

■ 1500W

Model No.	Continue power	Peak power	Input VDC	Output VAC / Hz	Output socket	Effi.
S1500-112B2	1500W	2000W	10.5-15	110/60	TYPE-2	85%
S1500-124B2	1500W	2000W	21.0-30	110/60	TYPE-2	87%
S1500-148B2	1500W	2000W	42.0-60	110/60	TYPE-2	88%
S1500-212E3	1500W	2000W	10.5-15	220/50	TYPE-3	86%
S1500-224E3	1500W	2000W	21.0-30	220/50	TYPE-3	89%
S1500-248E3	1500W	2000W	42.0-60	220/50	TYPE-3	90%